
# Kevlar Collection 60 Inch Kevlar Fan MWH

310150MWH (Matte White)

#### **Dimensions**

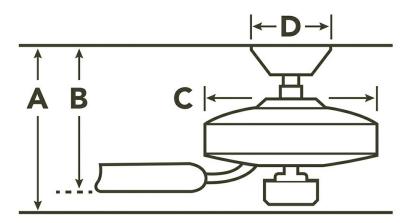

Downrod	Α	В	С	D
1.00 OD X 4.50	13.75	11.50	13.00	6.75

Project Name:	
Location:	
Туре:	
Qty:	
Comments:	

#### **Product Information**

Product ID	310150MWH
Finish	Matte White
Blade Finish	Matte White
Collection	Kevlar Collection

#### Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	148	6210	83	.63	75
Med	100	4238	115	.44	37
Low	57	2244	171	.26	13

#### **Specifications**

Specifications	
Number of Blades	5
Blades Included	Yes
Blade Pitch	14 Degrees
Blade Sweep	60"
Blades Reversible	No
Blade Material	ABS
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	Pull Chain - In project applications using multiple ceiling fans, alternative remote controls may be required. Please contact Kichler Advanced Product Solutions at 844-542-4537 to confirm your project requirements.
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	Yes, Low Ceiling Adaptable
Lead Wire Length	78.00"
Motor Size	188MM X 25MM
Motor Type	AC INDUCTION

### Downlight

Watts	75/37/13
Optional Light Kit Available	No





## Kevlar Collection 60 Inch Kevlar Fan MWH

310150MWH (Matte White)

					_			
Δι	121	ıal	n	Δ	ы	n	IC	hes
$\neg$	vali	ıaı	U					IICO

Finish	Fixture	Glass	Blade 1	Blade 2
Weathered Steel Powder Coat	310150WSP		SATIN BLACK	
Matte White	310150MWH		MATTE WHITE	
Weathered Copper Powder Coat	310150WCP		BROWN	

Project Name:	
Location:	
Туре:	
Qty:	
Comments:	

### Safety Listings & Certifications

Safety Rated	Wet
Warranty	www.kichler.com/warranty
Installation	
Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Hanging Weight	26.20 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7 feet

